

## JCB SKID STEER LOADER RANGE





**The versatility you expect from a skid steer.  
The safety and visibility you don't.**



## WORLD'S SAFEST SKID STEER



In today's tough, hazardous working conditions, the safety of the skid steer operator is paramount. That's why JCB designed the world's first skid steer loaders with a side door. That means, unlike ordinary skid steers, you'll never risk injury by climbing over attachments to enter the cab through the front window. JCB's New Generation skid steers also offer an unparalleled 270 degrees of visibility. That's 60 percent more than ordinary skid steers.

We've accomplished this thanks to JCB's unique PowerBoom design, a concept that promotes operator safety, productivity and machine reliability under the most extreme job site conditions. JCB's New Generation skid steers also take into account operator comfort. We made our cab up to 46% larger, and quieter than other skid steers.

## 5 Small platform models for any application...

JCB New Generation skid steers are the world's safest. Whatever model you choose, our five reasons to buy come as standard. JCB skid steers have:

- Unique side door for easy entry and exit
- Unrivalled 270° visibility, 60% advantage vs competition
- 46% larger cab, with extremely low noise levels
- Easier to service with 21% better SAE rating
- Up to 16% better fuel consumption

Now available in both radial and vertical lift configurations, JCB's small platform range can suit virtually any application. Whatever the job, there's a JCB skid steer to tackle it.



135



### FEATURES

- 1350 lbs (612kg) rated operating capacity, 6067 lbs (2751kg) operating weight
- 47.9 hp naturally aspirated diesel engine
- Radial lift design for greater forward reach at mid range and high performance in heavy digging applications
- The smallest model in JCB's range of skid steer loaders – perfect in tight, and confined areas

155



### FEATURES

- 1550 lbs (703kg) rated operating capacity, 6270 lbs (2844kg) operating weight
- 59.9 hp turbo charged diesel engine
- Radial Lift design for greater forward reach at mid range and high performance in heavy digging applications
- The largest radial lift model in JCB's range of small platform skid steer loaders



175



FEATURES

- 1750 lbs (794kg) rated operating capacity, 6638 lbs (3010kg) operating weight.
- 59.9 hp turbo charged diesel engine
- Vertical lift design for maximum reach at full lift height
- The smallest vertical lift model in JCB's range of skid steer loaders

190



FEATURES

- 1900 lbs (862kg) rated operating capacity, 6894 lbs (3127kg) operating weight
- 59.9 hp turbo charged diesel engine
- Vertical lift design for maximum reach at full lift height
- Excellent combination of compact size and greater lift capacity

205



FEATURES

- 2050 lbs (930kg) rated operating capacity, 7136 lbs (3236kg) operating weight
- 59.9 hp turbo charged diesel engine
- Vertical lift design for maximum reach at full lift height
- The largest vertical lift model in JCB's range of small platform skid steer loaders. Large platform performance at a small platform price



## 5 Large platform models any application...

JCB New Generation skid steers are the world's safest. Whatever model you choose, our five reasons to buy come as standard. JCB skid steers have:

- Unique side door for easy entry and exit
- Unrivalled 270° visibility, 60% advantage vs competition
- 33% larger cab, with industry low noise levels
- Easier to service with 24% better SAE rating
- Up to 16% better fuel consumption

Now available in both radial and vertical lift configurations, JCB's large platform range can suit virtually any application. Whatever the job, there's a JCB skid steer to tackle it.



225



### FEATURES

- 2250 lbs (1021kg) rated operating capacity, 8111 lbs (3679kg) operating weight
- 74 hp JCB DIESELMAX engine, both powerful and fuel-efficient
- Radial lift design for greater forward reach at mid range and high performance in heavy digging applications
- The largest radial lift design in JCB's skid steer line-up

260



### FEATURES

- 2600 lbs (1179kg) rated operating capacity, 8389 lbs (3805kg) operating weight
- 74 hp JCB DIESELMAX engine, 12 x 16.5 wide track floatation tyres
- Vertical lift design for maximum reach at full lift height



280



#### FEATURES

- 2800 lbs (1270kg) rated operating capacity; 8525 lbs (3867kg) operating weight
- Increased lift capacity provides improved performance and productivity
- 74 hp JCB DIESELMAX engine provides the power needed around the job site
- Vertical lift design for maximum reach at full lift height

300



#### FEATURES

- 3000 lbs (1361 kg) rated operating capacity; 8966 lbs (4067kg) operating weight
- Greatest lift capacity in a compact design for maximum productivity
- 92 hp JCB DIESELMAX engine provides increased power for maximum performance
- Vertical lift design enhances machine versatility

330



#### FEATURES

- 3300 lbs (1495kg) rated operating capacity; 9266 lbs (4203kg) operating weight
- Standard 2-speed travel, combined with the powerful 92 hp DIESELMAX engine
- Larger tyres provide increased lift height and ground clearance
- Largest machine in JCB's range, easily handles the biggest jobs

# Intelligent design with added safety

## Intelligent design

JCB adapted the technology from its world-leading telescopic handlers to give our skid steer customers the unique advantage of a common-sense door. Positioning the skid steer door on the side is just one more JCB innovation in a long history of advancements that date back to the introduction of the world's first backhoe loader in 1953.

Like our telescopic handlers, we achieved superb stability on JCB skid steers by offsetting power train components and the cab to provide for a well-balanced machine. And, like telescopic handlers, our operators have an exceptional view around the work site, making them safer and more productive.

## A unique door

Operators of ordinary skid steers have grown accustomed to courting danger every day by climbing in and out of their machines through the front window. That involves clambering over large, potentially dangerous attachments just to enter or leave the cab. JCB takes the common-sense approach – by positioning the door on the side of the machine.

Having a side door also makes the JCB skid steer more productive. Now there's no need to remove loads of material to get in and out of the machine. What other skid steer design allows the operator to enter or exit a skid steer as safely and easily? None.



**JCB's PowerBoom design is  
proven in their world's best-selling  
telescopic handlers.**





# No compromise on performance

## One boom is better than 2 arms

JCB's PowerBoom contains up to 20 percent more steel than the two arms of an ordinary skid steer loader. This extra margin of steel provides the strength to give you a lifetime of productivity, whatever the application. Single booms aren't new – JCB telescopic handlers and hydraulic excavators have clearly demonstrated the power of the design. Furthermore, as the world leader in telescopic handler sales, JCB has the experience and track record to transform ordinary skid steer designs into something far greater.


## Proven performance

Vertical lift provides maximum lift capacity at maximum height and reach. Achieving vertical lift with ordinary skid steers comes with a compromise – the torque tube restricts rear visibility. This is not an issue with JCB's PowerBoom design.

Radial lift provides an improved digging geometry, which gives you more reach at mid point in the lift cycle. This design is also preferred in arduous applications that do not require reach at full lift height.

The heart of the JCB product is its power plant, which is purpose-built for the construction equipment industry. This powerful turbocharged diesel engine provides incredible power at low RPMs, thus reducing fuel consumption and exhaust emissions while supplying enough torque for the toughest of jobs.

JCB's vertical lift design gives the operator maximum reach at height, which enables you to fill a dump truck from one side.

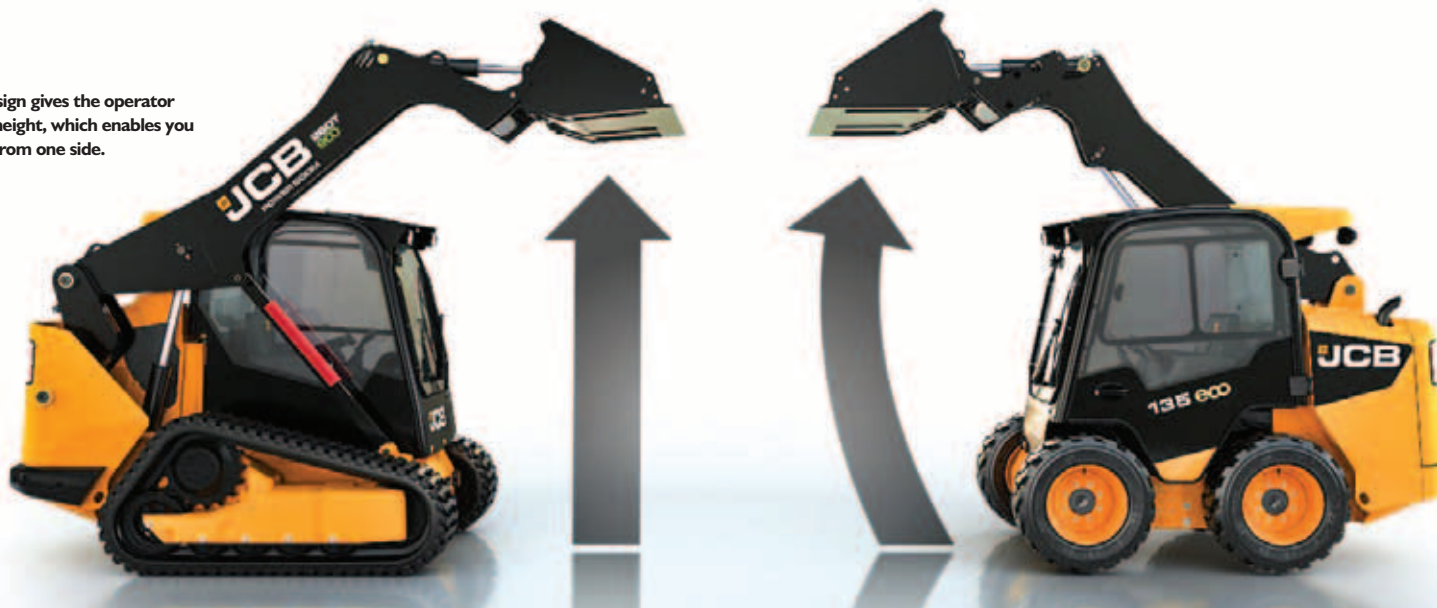








# Visibly better

## Ordinary skid steer 165° Visibility

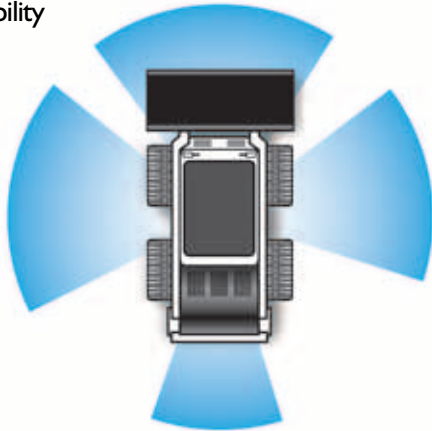

## JCB skid steer 270° Visibility



An independent study by an accredited engineering college verifies JCB's visibility advantage.

### 60% better than competitors

JCB skid steers offer unmatched visibility for our operators – 270 degrees of visibility, in fact, which is 60 percent more than that offered by ordinary skid steers. Common sense shows the more you can see, the more productive you are and the less likely you are to injure yourself or your co-workers. It has been documented that the highest percentages of accidents involving construction equipment occur when reversing. JCB's PowerBoom design eliminates the need for a rear torque tube, as found on competitive vertical lift machines, which further enhances rearward visibility. JCB improves visibility even more by installing a rear-view mirror on every skid steer model.

### No mesh for a clear view

Enclosed cab versions of the new JCB skid steer feature laminated protective glass, not the steel mesh found on ordinary skid steers. This gives our skid steer operators unhindered visibility all around the machine, just like we provide on our telescopic handlers. On canopy versions, JCB provides a half door, a feature that again maximises operator visibility. And, because there's no loader arm on the left side of the machine, JCB skid steer operators enjoy a completely unobstructed view on both sides of the machine.







# Work in total comfort

## Up to 46% more cab space

JCB operators will marvel at the comfortable and spacious skid steer cab. In fact, our cab helps to prove the old adage: a comfortable operator is a productive operator. Many skid steer owners are operators and the cab is their office. That's why it makes sense to enter the machine through a door rather than the front window. Also because the JCB skid steer's door is more than twice the size of our competitor's front window, entering and exiting are safe and easy. The cab's interior boasts up to 46% more space than competitive machines, which makes for a more comfortable day at the office. Ample storage space is also provided in the armrests of the machine and in the tool-storage area.

## A comfortable environment

The JCB cab features an industry-low noise level of 76dB(A). That's half the level of ordinary skid steers. Lower ambient noise means the operator can concentrate on the task at hand. An AM/FM/MP3 player enables the operator to enjoy background music or stay up to date on current events. A standard adjustable suspension seat provides added comfort and support, even over the roughest terrain. The JCB machine has been designed with the operator in mind, from easy-to-view overhead control panels placed in the operator's line of sight to intuitive, easy-to-use controls. Three operator compartment configurations are available – open canopy, cab with heat, and cab with heat and air conditioning.



Machine option controls are ergonomically placed at roof level in the operator's line of sight.



The right control panel features machine diagnostics, an electronic throttle and the skid steer's ignition.



An optional multi-function joystick enables the user to operate a wider variety of hydraulically driven attachments. The left arm rest also features a storage compartment.





The JCB cab environment is 46% larger than competitor machines on Small Platform models (33% larger on Large Platform) and features an industry low 76dB(A) noise level.

# More accessibility means less downtime

## Best-in-class serviceability

You can rely on JCB to make life easier and less costly when it comes to servicing your skid steer. A large opening rear door allows you access to the engine and all daily checkpoints. There is even a top-opening hood for enhanced access to the top of the engine and radiator clean out. JCB's PowerBoom design features 35% fewer grease points than twin-arm competitors. Extended greasing intervals of 50 hours enable you to spend less time servicing the machine and more time earning money with it.

## Tilting cab design

A new tilting cab design allows easy access to the machine's power train and hydraulic components for maintenance and servicing. New O-Ring Face Seal hydraulic fittings and a simplified overall design result in 38% fewer parts; that means fewer parts to service. To ensure complete peace of mind, JCB also provides customers with a standard one-year warranty. And, to make sure you get the parts you want when you want them, we also offer a 48-hour parts guarantee.



JCB's tilting cab design allows easy access for maintenance and servicing.







# Whatever the job, whatever the season

## 31 attachment ranges

Our new range of 31 types of attachments provides ultimate versatility. That gives you the flexibility to use your JCB skid steer all year round. JCB attachments are designed to meet stringent JCB standards. The universal mechanical quickhitch allows for easy interchange between attachments. An optional hydraulic quickhitch enables you to change attachments from the comfort of your cab. An optional 7-way multi-function joystick allows you to use a wider variety of hydraulically driven attachments.



## Enhancing your productivity

A wide array of options further enhance productivity. Multiple tyre options allow the machines to be utilised in many different environments. The two-speed transmission option allows for faster travel speeds. JCB's Smooth Ride System reduces material spillage during load and carry operations while enhancing operator comfort. The Parallel Lift option helps keep loads level throughout the lift cycle; that's a benefit when handling palletised loads. High-flow hydraulics expand the range of attachments that can be used with the machine.



A brochure listing the full range of skid steer attachments is available from JCB. Find out more at [www.jcb.com](http://www.jcb.com).



AUGERS



BALE SPIKES



BREAKERS


BROOMS,  
ANGLE

BROOMS,  
SWEEPER COLLECTOR


BRUSH CUTTERS


BUCKETS,  
6-IN-1 MULTI-PURPOSE

BUCKETS,  
GENERAL PURPOSE

BUCKETS,  
LANDSCAPE

BUCKETS,  
LIGHT MATERIAL

BUCKETS,  
SNOW


PATCH PLANERS



DOZER BLADES



FORESTRY CUTTING HEADS


FORKS,  
MANURE

FORKS,  
PALLET

GRAPPLES,  
BRUSH

GRAPPLES,  
SCRAP

RAKES,  
AUTO

RAKES,  
LANDSCAPE POWER

RAKES,  
LANDSCAPE PREPARATOR


ROCK SAWS



SILAGE DEFACERS



SNOW BLADES



SNOW BLOWERS



SNOW PUSHERS



STUMP GRINDERS




TILLERS



TREE SPADES



TRENCHERS



VIBRATORY ROLLERS



**From breakers and buckets to rakes and rollers,  
JCB's attachments keep you productive year round**

**Safety and superb  
operator environment for  
greater productivity**





1



#### VISIBILITY

- 270 degrees of visibility, compared to 165 degrees with other skid steers, giving JCB a 60 percent advantage.
- Eliminating the loader arm torque tube provides for superb rear visibility.
- Standard rear-view mirror placed at the operator's eye level further enhances operator visibility.
- Mesh-free enclosed cab design provides unobstructed visibility, similar to telescopic handlers.
- A clear view to the bucket cutting edge provides for increased productivity on the job site.

4



#### POWERBOOM

- Common-sense boom design maximises machine performance.
- JCB's PowerBoom has up to 20 percent more steel in one boom than the two arms of competitive skid steers.
- It allows greater visibility on the job site, with no need for torque tubes or an arm on the left side of the machine.
- Proven intelligent design from the maker of the world's best-selling telescopic handlers.
- Vertical lift design allows for more reach at maximum lift height, while radial lift gives you more reach at the mid-point of the lift cycle.

2



#### DOOR

- A common-sense door eliminates the need to climb in through the front window over dangerous attachments.
- The JCB door is twice the size of our competitor's entry to the machine through the front window.
- The door size has been increased and is now 40% larger, allowing easy access to the machine.
- We employ the same intelligent design found on our telescopic handlers: boom design and side-entry cab.
- Sliding left side window for increased ventilation.

5



#### CAB ENVIRONMENT

- The modular cab with integrated floor is up to 46% larger than ordinary skid steer cabs.
- Includes a comfortable, standard mechanical suspension seat, with an option for air suspension with heat.
- Pressurised and isolation mounted enclosed cab design provides a more comfortable work environment.
- Industry low 76dB(A) internal cab noise that is more than half the sound level of ordinary skid steers.
- All controls and machine functions are ergonomically placed within easy reach of the operator.

3



#### SERVICEABILITY






- Large rear opening service door provides exceptional access to all daily maintenance points.
- Access is further enhanced with top-opening hood for radiator clean out and visibility of the top side of the engine.
- Tilting cab design enables easy access during more detailed machine maintenance.
- O-Ring Face Seal hydraulic fittings and 38 percent fewer parts mean less downtime.
- Hydraulically driven variable speed fan helps to minimise internal and external noise.

6




#### VERSATILITY

- Optional 7-way multi-function joysticks allow easy operation of hydraulically driven attachments.
- Standard mechanical universal quickhitch with an available Hydraulic quickhitch option
- Choose from 31 attachment ranges providing up to 200 distinct attachments.
- Increased hydraulic horsepower, maximises performance of many hydraulically driven attachments.
- Faster cycle times with the optional 2-speed transmission for more speed around the job site.

MACHINE SPECIFICATIONS	135	155	175	190	205
					
Lift Path	Radial Lift	Radial Lift	Vertical Lift	Vertical Lift	Vertical Lift
Operating Weight lbs (kgs)	6067 (2752)	6270 (2844)	6638 (3011)	6894 (3127)	7136 (3237)
Engine Model	404D-22	404D-22T	404D-22T	404D-22T	404D-22T
Gross Horsepower hp (kW)	47.9 (35.7)	59.9 (44.7)	59.9 (44.7)	59.9 (44.7)	59.9 (44.7)
Gross Torque lb/ft (Nm)	105 (143)	139 (189)	139 (189)	139 (189)	139 (189)
Visibility	270°	270°	270°	270°	270°
LOADER SPECIFICATIONS	135	155	175	190	205
Rated Operating Capacity lbs (kg)	1350 (612)	1550 (703)	1750 (794)	1900 (862)	2050 (930)
Tipping Load lbs (kg)	2989 (1356)	3100 (1406)	3500 (1587)	3800 (1723)	4100 (1859)
Loader Lift Force lbs (kg)	3175 (1440)	3902 (1770)	3461 (1570)	3461 (1570)	3461 (1570)
Bucket Breakout Force lbs (kg)	4012 (1820)	4012 (1820)	4718 (2140)	4718 (2140)	4718 (2140)
SPECIFICATIONS	135	155	175	190	205
Auxiliary Hydraulic Flow - gpm (lpm)	18.5 (70)	18.5 (70)	18.5 (70)	18.5 (70)	18.5 (70)
High Flow - gpm (lpm)	n/a	26.4 (100)	26.4 (100)	26.4 (100)	26.4 (100)
Main Relief Pressure - psi (bar)	3335 (230)	3335 (230)	3335 (230)	3335 (230)	3335 (230)
Single Speed - mph (kph)	7.5 (12)	7.5 (12)	7.5 (12)	7.5 (12)	7.5 (12)
Two Speed - mph (kph)	n/a	5.6 (9) / 11.5 (18.5)	5.6 (9) / 11.5 (18.5)	5.6 (9) / 11.5 (18.5)	5.6 (9) / 11.5 (18.5)



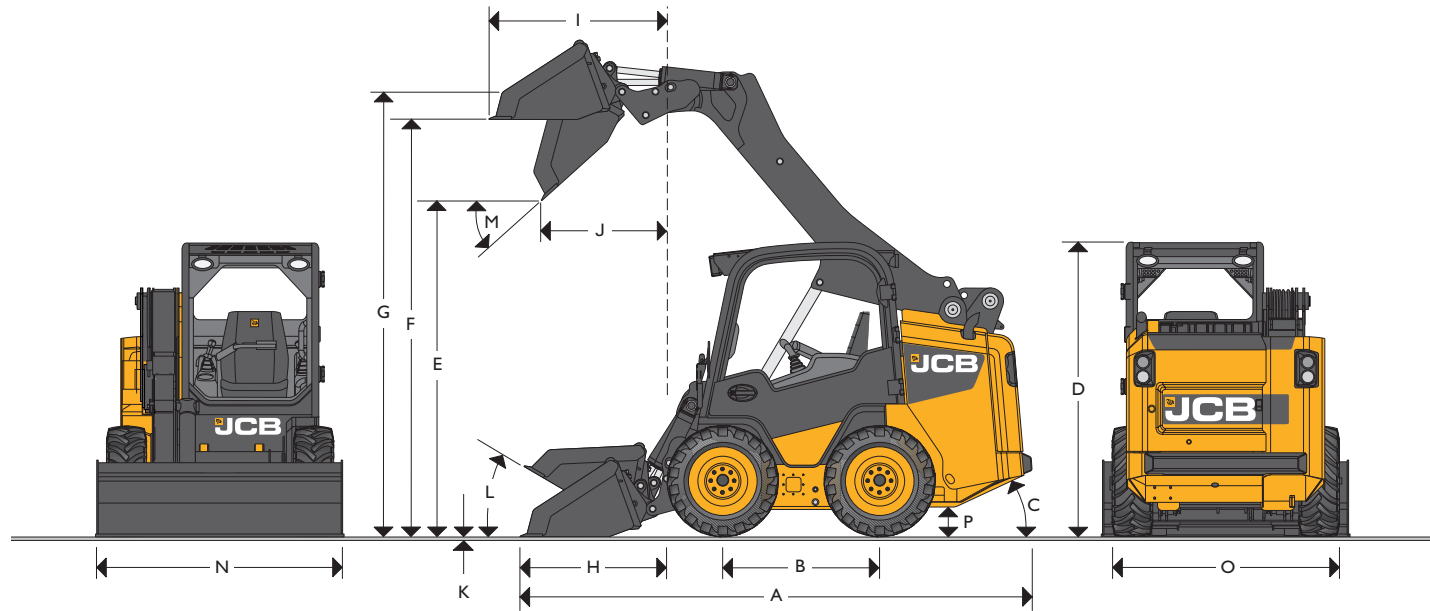

\* Illustration represents vertical lift machine.


### STATIC DIMENSIONS – 135 / 155 / 175 / 190 / 205

Machine Models	135	155	175	190	205
	ft-in (m)	ft-in (m)	ft-in (m)	ft-in (m)	ft-in (m)
A Overall Length	11-5 (3.49)	11-5 (3.49)	11-7 (3.53)	11-8 (3.56)	11-10 (3.61)
B Wheelbase	3-6 (1.07)	3-6 (1.07)	3-6 (1.07)	3-6 (1.07)	3-6 (1.07)
C Angle of Departure	25°	25°	25°	25°	25°
D Overall Height	6-6 (1.98)	6-6 (1.98)	6-6 (1.98)	6-6 (1.98)	6-6 (1.98)
E Dump Height	7-5 (2.26)	7-5 (2.26)	7-5 (2.26)	7-5 (2.26)	7-5 (2.26)
F Loadover Height	9-4 (2.84)	9-4 (2.84)	9-4 (2.84)	9-4 (2.84)	9-4 (2.84)
G Height to Hinge Pin Fully Raised	9-10 (3.00)	9-10 (3.00)	9-10 (3.00)	9-10 (3.00)	9-10 (3.00)
H Reach @ Ground Level (cutting edge)	3-3 (1.00)	3-3 (1.00)	3-3 (1.00)	3-3 (1.00)	3-3 (1.00)
I Max Reach @ Full Height	3-0 (.91)	3-0 (.91)	3-2 (.97)	3-3 (.99)	3-5 (1.04)
J Reach @ Full Height - Fully Dumped	1-10 (.56)	1-10 (.56)	2-9 (.86)	2-9 (.86)	2-9 (.86)
K Dig Depth (toe plate horizontal) Clearance	-0.4 (-10)	-0.4 (-10)	-0.4 (-10)	-0.4 (-10)	-0.4 (-10)
L Rollback @ Ground	30°	30°	30°	30°	30°

Machine Models	135	155	175	190	205
	ft-in (m)	ft-in (m)	ft-in (m)	ft-in (m)	ft-in (m)
M Dump Angle	42°	42°	42°	42°	42°
N Bucket Width - Standard	5-0 (1.52)	5-5 (1.68)	5-5 (1.68)	5-8 (1.73)	6-0 (1.83)
Bucket Width - Optional	4-6 (1.37)	5-0 (1.52)	5-8 (1.73)	6-0 (1.83)	5-8 (1.68)
O Width Over Tyres - Standard	4-11 (1.52)	5-3 (1.60)	5-3 (1.60)	5-3 (1.60)	5-3 (1.60)
Width Over Tyres - Optional	4-5 (1.37)	5-0 (1.52)	5-0 (1.52)	5-0 (1.52)	5-0 (1.52)
Rated Operating Capacity	1350 (612)	1550 (703)	1750 (794)	1900 (862)	2050 (930)
Bucket Capacity - Standard	.47 (.36)	.52 (.40)	.52 (.40)	.53 (.41)	.57 (.44)
Turning Radius					
Bucket Corner Radius	6-10 (2.09)	6-10 (2.09)	6-10 (2.09)	6-10 (2.09)	6-10 (2.09)
Quickhitch Radius	3-7 (1.10)	3-7 (1.10)	3-9 (1.14)	3-9 (1.14)	3-9 (1.14)
Rear Chassis Radius	5-5 (1.65)	5-5 (1.65)	5-5 (1.65)	5-5 (1.65)	5-5 (1.65)
P Ground Clearance	8.3 (210)	8.3 (210)	8.3 (210)	8.3 (210)	8.3 (210)
Lift Path	Radial	Radial	Vertical	Vertical	Vertical

MACHINE SPECIFICATIONS	225	260	280	300	330
					
Lift Path	Radial Lift	Vertical Lift	Vertical Lift	Vertical Lift	Vertical Lift
Operating Weight lbs (kgs)	8111 (3679)	8389 (3805)	8525 (3867)	8966 (4067)	9266 (4203)
Engine Model	JCB DIESELMAX TC-55	JCB DIESELMAX TC-55	JCB DIESELMAX TC-55	JCB DIESELMAX TC-68	JCB DIESELMAX TC-68
Gross Horsepower hp (kW)	74 (55)	74 (55)	74 (55)	92 (68.6)	92 (68.6)
Gross Torque lb/ft (Nm)	241 (327)	241 (327)	241 (327)	301 (408)	301 (408)
Visibility	270°	270°	270°	270°	270°
LOADER SPECIFICATIONS	225	260	280	300	330
Rated Operating Capacity lbs (kg)	2250 (1021)	2600 (1179)	2800 (1271)	3000 (1360)	3295 (1495)
Tipping Load lbs (kg)	4908 (2226)	5448 (2471)	5608 (2453)	6024 (2732)	6590 (2989)
Loader Lift Force lbs (kg)	5884 (2669)	5809 (2634)	5809 (2634)	5809 (2634)	5809 (2634)
Bucket Breakout Force lbs (kg)	5699 (2585)	7187 (3260)	7187 (3260)	7187 (3260)	7187 (3260)
SPECIFICATIONS	225	260	280	300	330
Auxiliary Hydraulic Flow - gpm (lpm)	23 (87)	23 (87)	23 (87)	23 (87)	23 (87)
High Flow - gpm (lpm)	35.7 (135)	35.7 (135)	35.7 (135)	35.7 (135)	35.7 (135)
Main Relief Pressure - psi (bar)	3335 (230)	3335 (230)	3335 (230)	3335 (230)	3335 (230)
Single Speed - mph (kph)	6.8 (10.9)	6.8 (10.9)	6.8 (10.9)	6.8 (10.9)	7.3 (11.7)
Two Speed - mph (kph)	6.8 (10.9) / 12.4 (20)	6.8 (10.9) / 12.4 (20)	6.8 (10.9) / 12.4 (20)	6.8 (10.9) / 12.4 (20)	7.3 (11.7) / 13.5 (21.7)



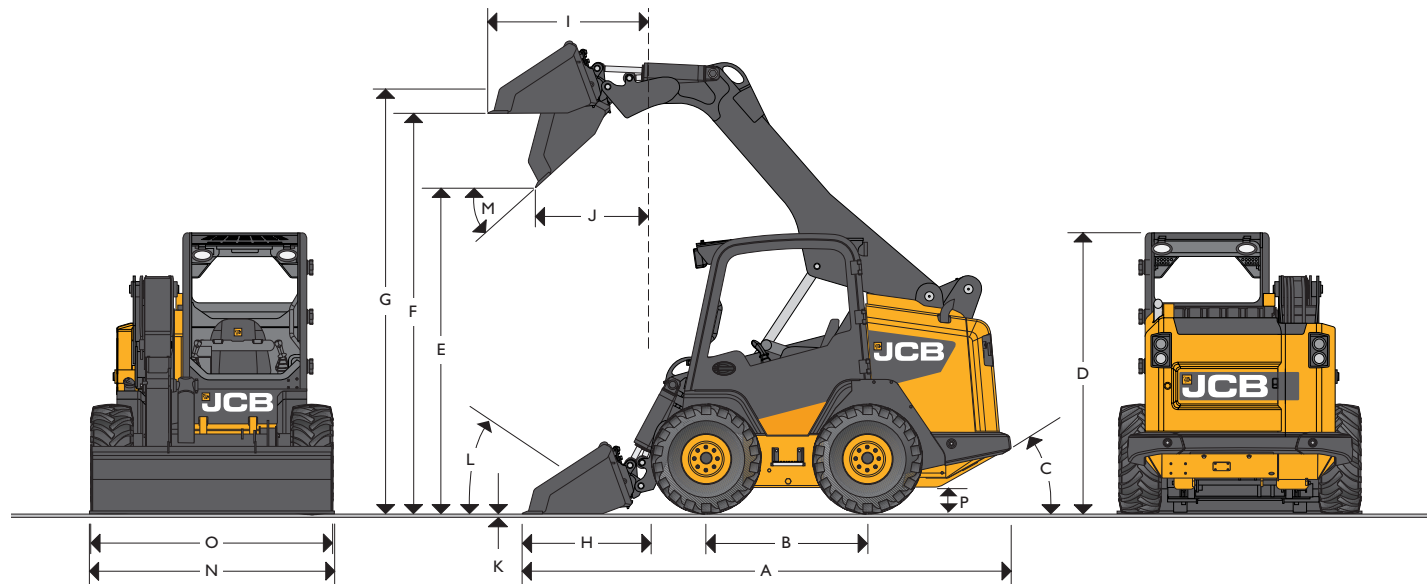

\* Illustration represents vertical lift machine.

### STATIC DIMENSIONS – 225 / 260 / 280 / 300 / 330

Machine Models	225	260	280	300	330
	ft-in (m)	ft-in (m)	ft-in (m)	ft-in (m)	ft-in (m)
<b>A</b> Overall Length	12-2 (3.69)	12-2 (3.69)	12-4 (3.76)	12-5 (3.78)	12-7 (3.80)
<b>B</b> Wheelbase	4-0 (1.22)	4-0 (1.22)	4-0 (1.22)	4-0 (1.22)	4-0 (1.22)
<b>C</b> Angle of Departure	28.7°	28.7°	28.7°	28.7°	29.1°
<b>D</b> Overall Height	6-10 (2.09)	6-10 (2.09)	6-10 (2.09)	6-10 (2.09)	6-11 (2.11)
<b>E</b> Dump Height	8-1 (2.46)	8-1 (2.46)	8-1 (2.46)	8-1 (2.46)	8-2 (2.49)
<b>F</b> Loadover Height	9-10 (3.02)	9-10 (3.02)	9-10 (3.02)	9-10 (3.02)	10 (3.05)
<b>G</b> Height to Hinge Pin Fully Raised	10-5 (3.175)	10-5 (3.175)	10-5 (3.175)	10-5 (3.175)	10-6 (3.2)
<b>H</b> Reach @ Ground Level	3-2.5 (0.98)	3-2.5 (0.98)	3-2.5 (0.98)	3-5 (1.04)	3-5 (1.04)
<b>I</b> Max Reach @ Full Height	3-2 (.96)	4-0.5 (1.23)	4-0.5 (1.23)	4-0.5 (1.23)	3-11 (1.2)
<b>J</b> Reach @ Full Height - Fully Dumped	1-11 (.59)	2-10 (0.87)	2-10 (0.87)	2-11 (0.90)	2-11 (0.90)
<b>K</b> Dig Depth (Toe Plate Horizontal) Clearance	-3/8 (-10)	-3/8 (-10)	-3/8 (-10)	-3/8 (-10)	0
<b>L</b> Rollback @ Ground	30°	30°	30°	30°	29°

Machine Models	225	260	280	300	330
	ft-in (m)	ft-in (m)	ft-in (m)	ft-in (m)	ft-in (m)
<b>M</b> Dump Angle	42°	42°	42°	42°	42°
<b>N</b> Bucket Width - Standard	6-0 (1.82)	6-0 (1.82)	6-0 (1.82)	6-0 (1.82)	6-6 (1.98)
<b>O</b> Width Over Tyres - Standard	6-0 (1.82)	6-0 (1.82)	6-0 (1.82)	6-0 (1.82)	6-2 (1.87)
Width Over Tyres - Optional	6-2 (1.87)	6-2 (1.87)	6-2 (1.87)	6-2 (1.87)	6-0 (1.82)
Rated Operating Capacity 50%	2250 (1021)	2600 (1179)	2800 (1270)	3000 (1361)	3295 (1495)
Bucket Capacity - Standard	.62 (.47)	.62 (.47)	.62 (.47)	.67 (.51)	.67 (.51)
<b>Turning Radius</b>					
Bucket Corner Radius	7-3 (2.20)	7-3 (2.20)	7-3 (2.20)	7-3 (2.20)	7-3 (2.20)
Quickhitch Radius	4-10.5 (1.48)	4-10.5 (1.48)	4-10.5 (1.48)	4-10.5 (1.48)	4-10.5 (1.48)
Rear Chassis Radius	5-9.5 (1.76)	5-9.5 (1.76)	5-9.5 (1.76)	5-9.5 (1.76)	5-9.5 (1.76)
<b>P</b> Ground Clearance	9.4 (238)	9.4 (238)	9.4 (238)	9.4 (238)	9.8 (248)
<b>Lift Path</b>	Radial	Vertical	Vertical	Vertical	Vertical

## LiveLink, knowledge is power

JCB LiveLink is an innovative software system that lets you monitor and manage your machines remotely – online, by email or by mobile phone.

LiveLink gives you access to a whole host of useful data, including machine alerts, fuel reports\* and event history information.

All your machine information is handled at a secure data centre for your peace of mind.

### Maintenance benefits


JCB LiveLink makes it easy to manage machine maintenance. Accurate hours monitoring and service alerts improve maintenance planning, and real-time location data helps you manage your fleet. You'll also have access to critical machine alerts and maintenance history records.



### Productivity and cost benefits

For ultimate productivity and cost-saving, JCB LiveLink provides information like idle time monitoring\* and machine fuel consumption\* to help reduce your fuel usage. Machine location information can improve fleet efficiency and you may even enjoy reduced insurance costs courtesy of the added security that LiveLink brings.

\* These features require an electronic engine.

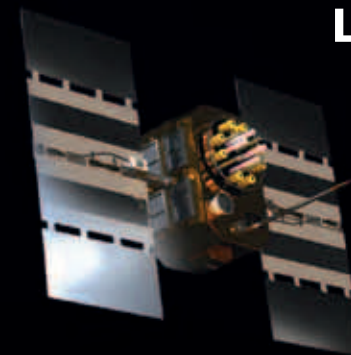

### Security benefits

Keep your machine operating safely with JCB LiveLink. Real-time geofencing alerts tell you when machines move out of predetermined operating zones, and real-time curfew alerts inform you if machines are being used when they're not supposed to be. Real time location information helps you store your machines in the safest places.





## Value added

JCB's worldwide customer support is first class. Whatever you need and wherever you are, we'll be available quickly and efficiently to help make sure your machinery is performing to its full potential.




Our Technical Support Service provides instant access to factory expertise, day or night, while our Finance and Insurance teams are always on hand to provide fast, flexible, competitive quotes. (1)

JCB Assetcare offers comprehensive extended warranties and service agreements, as well as service-only or repair and maintenance contracts. Irrespective of what you opt for, our Maintenance teams around the world charge competitive labour rates, and offer non-obligation quotations as well as fast, efficient insurance repair work. (3)



The global network of JCB Parts Centres is another model of efficiency; with 16 regional bases, we can deliver around 95% of all parts anywhere in the world within 24 hours. Our genuine JCB parts are designed to work in perfect harmony with your machine for optimum performance and productivity. (2)

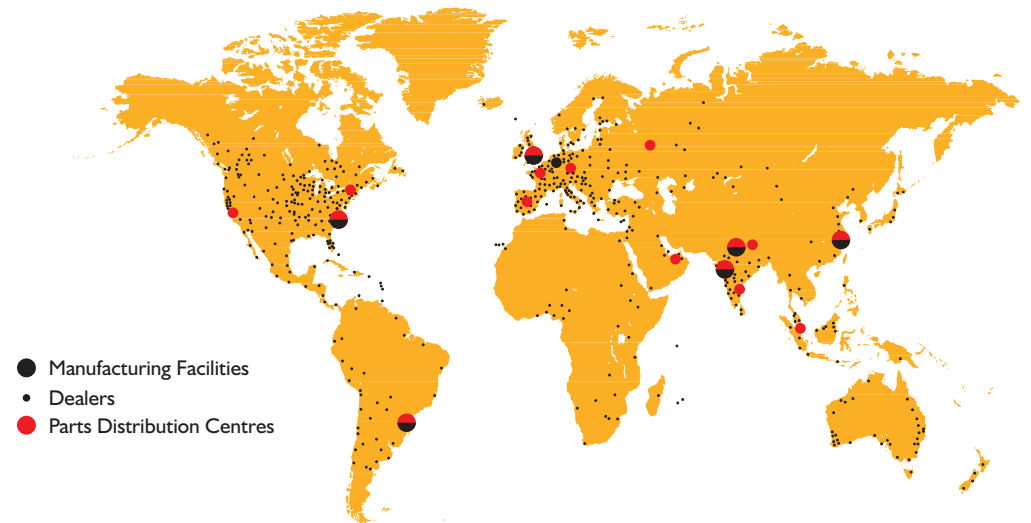



JCB Sales Limited, Rocester, Staffordshire, United Kingdom ST14 5JP. Tel: +44 (0)1889 590312

Download the very latest information on this product range at: [www.jcb.com](http://www.jcb.com)

©2009 JCB Sales. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any other means, electronic, mechanical, photocopying or otherwise, without prior permission from JCB Sales. JCB reserves the right to change specifications without notice. Illustrations and specifications shown may include optional equipment and accessories. The JCB logo is a registered trademark of J C Bamford Excavators Ltd.

